

48Ports 1000Mbps Managed PoE Switch with 4Ports 10G SFP+

MSTP

RSTP



Key Features:

IPv6/IPv4

ACL/QoS

Ports: Provide 48*1000Mbps PoE ports with 4 Ports 10G SFP+ Uplink
Self-adaption: RJ45 port supports 1000Mbps Auto MDI/MDIX
Fiber Port: 4 Ports 10G SFP+ Uplink
Wide Application: Designed for Wifi AP and IP Security camera.VoIP etc
Managed: Support remote web managed, VLAN and storm contro and IPV6 managementl etc.
Surge protection: Protect the device from lighting surges and others electrical hazards
Considerate Design: Exquisite compact size.wall mounted with fanless design
Easy to use: Plug and play, No configuration required
Installation: Rack mount with easy installation

6KV

Introducing a new Gigabit Managed POE Switch for future-proof deployments

Benchu Group 48-Port Gigabit Web Smart PoE+ Switch with 48 1000BASE-T PoE+ ports and four 10G SFP+ slots, It delivers advanced management features with an 256Gbps switching capacity. The SP7500-48GP4TF-L2 is equipped with 1000BASE-T PoE+ ports that provide higher gigabit speeds capable of up to 1000Mbps over existing Cat5e or better cabling. This switch provides eight PoE+ connections with a Max power budget of 600W, and supplies up to 30W of power per port for devices such as wireless access points, PTZ IP cameras, and VoIP telephony systems.

1000Mbps Capability for Diversified Bandwidth Applications

With the terminal access rates of 802.11ac wireless APs reaching as high as 1Gbps, Gigabit ports has been unable to satisfy the demand. Supporting 1Gbps capability and 802.3af/at POE output, the SP7500-48GP4TF-L2 can deliver not only data to 802.11ac wireless APs, but also power to other powered devices such as APs and IP cameras.

10 Gbps SFP Ports Optimize Network Performance

The SP7500-48GP4TF-L2 provides greater bandwidth and powerful processing capacity. It offers a maximum 40Gbps uplink bandwidth through the Four 10Gbps SFP+ ports. In addition, the administrator can flexibly choose the suitable SFP/SFP+ transceiver according to the transmission distance or the transmission speed required to extend the network efficiently.

Cost-effective IPv6 Managed Gigabit Ethernet Switch Solution

With layer 2+ managed Gigabit Ethernet Switch, It provides IPv6/IPv4 management and built-in L2/L4 Gigabit Switching engine, and supports high-speed transmission of surveillance images and videos.

Surge Protection Design

Reaching 6KV surge protection, the Ethernet ports owns the capacity to keep the Ethernet Switch from lightning strikes and other electrical surges, offering reliable performance even in some harsh environments.

SP7500-48GP4TF-L2

48 ports 1000Mbps Managed PoE Switch with 4 Ports 10G SFP+ Uplink

Technical Datasheet

Model	SP7500-48GP4TF-L2		
Hardware Specifications			
Connector	48 10/100/1000BASE-T RJ45 auto MDI/MDIX ports 4 10G Base-X SFP+ Slots Uplink 1 Console port		
Uplink port	4 10G Base-X SFP+ Slots		
LED Display	Power Indicator: PWR(green). Network Indicator: Link(yellow) POE: Orange SFP: Green		
Thermal Fan	Fanless Design		
Network Standard	IIEEE 802.3u 100BASE-TX/100BASE-FX IEEE 802.3z 1000BASE-SX/LX IEEE 802.3ab 1000BASE-T IEEE 802.3ae 10Gb/s Ethernet IEEE 802.3x flow control and back pressure IEEE802.3az EEE		
Switch Architecture	Store and Forward		
Transmission model	IEEE802.3X full-duplex and Backpressure half-duplex		
Switch Performance	Backplane bandwidth Packet forwarding rate MAC address	256Gbps 232Mpps 32k	
Power requirement	AC100-240V 50/60Hz		
ESD Protection	6KV ESD		
Dimension	440mm x 290mm x 44.5mm(17.32in x 11.42in x 1.75in)		
Weight	6.5kg		
Environment	Operating temperature: -20°C~55°C, operating humidity: 5%~95% Storage temperature: -40°C~75°C, storage humidity: 5%~95%		
Safety	FCC Part15 Class A,CE.RoHs		


Power over Ethernet (PoE) Specifications		
PoE Standard	IEEE 802.3af Power over Ethernet/PSE	
	IEEE 802.3at Power over Ethernet Plus/PSE	
PoE Supply Type	1/2(+), 3/6(-) End-span	
PoE Power Output	Per Port 52V DC, 300mA. max. 15.4 watts (IEEE 802.3af)	
	Per Port 52V DC, 600mA. max. 30 watts (IEEE 802.3at)	
PoE Power budget	600W	

Layer 2 Functions		
Port Mirroring	TX / RX / both Many-to-1 monitor	
i or minoring	802.1Q tagged-based VLAN	
	Up to 256 VLAN groups, out of 4094 VLAN IDs	
Vlan	802.1ad Q-in-Q tunneling	
	Voice VLAN;Protocol VLAN;Private VLAN (Protected port),GVRP	
	IEEE 802.3ad LACP and static trunk	
Link Aggregation	Supports 8 groups of 8-port trunk	
	STP, IEEE 802.1D Spanning Tree Protocol	
Spanning Tree Protocol	RSTP, IEEE 802.1w Rapid Spanning Tree Protocol	
	MSTP, IEEE 802.1s Multiple Spanning Tree Protocol	
IGMP Snooping	IGMP (v2/v3) snooping	
	IGMP querier	
	Up to 256 multicast groups	
MLD Snooping	MLD (v1/v2) snooping, up to 256 multicast groups	
Access Control List	IPv4/IPv6 IP-based ACL / MAC-based ACL	
	Open or close port	
PoE Management	Standard POE scheduling management Power and current display	
I OL Managomon	Automatic restarting function of equipment dead machine Timing Support IP bindings restarting	
	8 mapping ID to 8 level priority queues	
	Port number	
	802.1p priority	
QoS	802.1Q VLAN tag	
	DSCP field in IP packet	
	Traffic classification based, strict priority and WRR	
	IEEE 802.1X port-based authentication	
	Built-in RADIUS client to co-operate with RADIUS server	
	RADIUS / TACACS+ user access authentication	
	IP-MAC port binding	
	MAC filtering	
Security	Static MAC address	
	DHCP Snooping and DHCP Option82	
	STP BPDU guard, BPDU filtering and BPDU forwarding	
	DoS attack prevention	
	ARP inspection	
Management Function		
	Web browser / Telnet / SNMP v1, v2c, V3	
Basic Management Interfaces	Firmware upgrade by HTTP / TFTP protocol through Ethernet network	
	Remote / Local Syslog,System log,LLDP protocol ,SNTP	
Secure Management Interfaces	SSH, SSL, SNMP	
SNMP MIBs	RFC 1213 MIB-II	
	RFC 1215 Generic Traps	
	RFC 1493 Bridge MIB	
	RFC 2674 Bridge MIB Extensions	
	RFC 2819 RMON (1, 2, 3, 9)	
	RFC 2863 Interface Group MIB	
	RFC 3635 Ethernet-like MIB	


SP7500-48GP4TF-L2

48 ports 1000Mbps Managed PoE Switch with 4 Ports 10G SFP+ Uplink


Interfaces

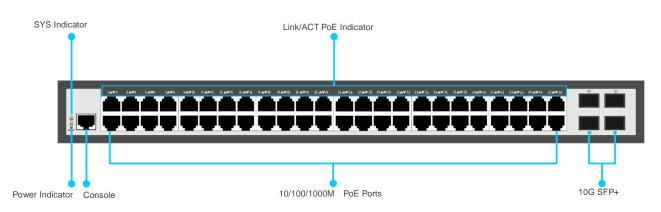

Structure Diagrams

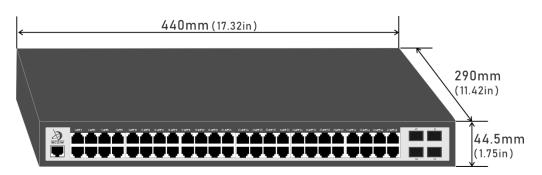

Applications

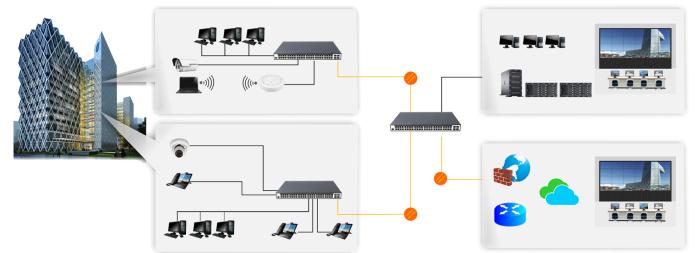

Ordering Information	
SP7500-48GP4TF-L2	48 Ports 10/100/1000Mbps Managed PoE switch with 4 Ports 10G SFP+ Uplink,6KV surge protection

3F,Block A3,Silicon Vally Industrial Park,Sili Rd,Guanlan,LongHua district, Shenzhen China,