



24-Port SFP L3 Industrial

Managed Switch with 8-1.25Gbps

RJ45 and 4-10G SFP+

IPv6/IPv4  
ACL/QoS



IES7521-24GF/8GE-4TF-AC

### Key Features:

**Ports:** Provide 24\*Gigabit SFP with 8\*10/100/1000Mbps Ethernet ports and 4\*10G SFP+ Uplink

**Self-adaption:** RJ45 port supports 10/100/1000Mbps Auto MDI/MDIX

**Fiber Port:**24\* 1000Mbps SFP and 4\*10G SFP+

**Software:** VLAN, Spanning Tree, Link Aggregation, Port Mirroring, Ring Protection, IP Routing(Static Routing, OSPF, RIP), Multicast, Storm Suppression, DHCP, QOS

**Managed:** Support remote web managed,VLAN and storm control and IPV6 management etc.

**Surge protection:** Protect the device from lighting surges and others electrical hazards

**Working Temperature:** -40 to 85 degrees operating temperature

**Considerate Design:** IP40 Industrial design

### IES7521 Series Layer 3 Managed Switch

Benchu Group IES7521-24GF/8GE-4TF-AC series industrial switches are L3 10G Switches based on new generation of high-performance hardware. It provides a large capacity, high-density GE interfaces,and 10G Fiber uplink interfaces. With extensive service features and IPv6 forwarding capabilities, supports Static Routing, RIP and OSPF ,this switch is applicable to various scenarios. For example, it can be used as an access or aggregation switch on campus networks or an access switch in data centers. The industrial switch integrates many advanced technologies in terms of reliability, security, and energy saving. It employs simple and convenient means of installation and maintenance to reduce customers' OAM cost and help enterprise customers build a next-generation IT network.

### Comprehensive QoS policies and security mechanisms

It supports strict ARP learning, which prevents ARP spoofing attacks that exhaust ARP entries, It also provides IP source guard to prevent DoS attacks caused by MAC address spoofing, IP address spoofing, and MAC/IP spoofing.

It supports DHCP snooping, which generates user binding entries based on users' access interfaces, MAC addresses, IP addresses, IP address leases, and VLAN IDs. DHCP snooping discards invalid packets that do not match any binding entries, such as ARP spoofing packets and IP spoofing packets.This prevents hackers from using ARP packets to initiate man-in-the-middle attacks on campus networks.The interface connected to a DHCP server can be configured as a trusted interface to protect the system against bogus DHCP server attacks.

### Easy deployment and maintenance free

Supports SNMP v1/v2/v3 and provides flexible methods for managing devices. Users can manage the switch using the CLI and Web NMS. Supports SSH2.0 and other encryption, which makes management much more secured and Supports LLDP protocol for simpler management.

# IES7521-24GF/8GE-4TF-AC

24 ports Gigabit SFP L3 Managed Industrial Switch with 8 gigabit RJ45 Combo and 4-10G SFP+ Uplink

## Technical Datasheet

Model	IES7511-24GF/8GE-4TF-AC	
Hardware Specifications		
Connector	24* 1000 Base-X SFP Slots	
	8* 10/100/1000BASE-T RJ45 auto MDI/MDIX ports Combo	
Uplink port	4* 10G Base-X SFP+ Slots	
Console	1 x RS232-to-RJ45 serial port (115200, 8, N, 1)	
LED Display	Power Indicator: PWR(green).	
	Network Indicator: Link(green)	
	SFP: Green	
Network Standard	IEEE802.3i 10 BASE-T	
	IEEE802.3u 100 BASE-TX	
	IEEE802.3ab/z 1000 BASE-TX	
	IEEE802.3x Flow Control	
	IEEE802.3az EEE	
Switch Architecture	Store and Forward	
Transmission model	IEEE802.3X full-duplex and Backpressure half-duplex	
Switch Performance	Backplane bandwidth	360Gbps
	Packet forwarding rate	252.16Mpps
	MAC address	16k
Power requirement	AC100-240V 50/60Hz	
ESD Protection	6KV ESD	
Dimension(W x D x H)	440 x 290 x 44.5mm(17.32in x 11.42in x 1.75in)	
Weight	4kg	
Environment	Operating temperature: -40℃~75℃， operating humidity: 5%~95%	
	Storage temperature: -50℃~80℃， storage humidity: 5%~95%	
Safety	FCC Part15 Class A,CE,RoHs	


Functions		
Port Mirroring	TX / RX / both    Many-to-1 monitor	
Vlan	802.1Q tagged-based VLAN	
	Up to 256 VLAN groups, out of 4094 VLAN IDs	
	802.1ad Q-in-Q tunneling	
	Voice VLAN;Protocol VLAN;Private VLAN (Protected port),GVRP	
Link Aggregation	IEEE 802.3ad LACP and static trunk	
	Supports 8 groups of 8-port trunk	
Spanning Tree Protocol	STP, IEEE 802.1D Spanning Tree Protocol	
	RSTP, IEEE 802.1w Rapid Spanning Tree Protocol	
	MSTP, IEEE 802.1s Multiple Spanning Tree Protocol	
IGMP Snooping	IGMP (v2/v3) snooping	
	IGMP querier Up to 256 multicast groups	

MLD Snooping	MLD (v1/v2) snooping, up to 256 multicast groups
Access Control List	IPv4/IPv6 IP-based ACL / MAC-based ACL
Reliability	ERPS(G.8032)
IP Routing	Static Routing, OSPF, RIP
QoS	8 mapping ID to 8 level priority queues --- Port number --- 802.1p priority --- 802.1Q VLAN tag --- DSCP field in IP packet Traffic classification based, strict priority and WRR
Security	IEEE 802.1X port-based authentication Built-in RADIUS client to co-operate with RADIUS server RADIUS / TACACS+ user access authentication IP-MAC port binding MAC filtering Static MAC address DHCP Snooping and DHCP Option82 STP BPDU guard, BPDU filtering and BPDU forwarding DoS attack prevention ARP inspection IP source guard
Management Function	
Basic Management Interfaces	Web browser / Telnet / SNMP v1, v2c, V3 Firmware upgrade by HTTP / TFTP protocol through Ethernet network Remote / Local Syslog, System log, LLDP protocol, SNMP
Secure Management Interfaces	SSH, SSL, SNMP
SNMP MIBs	RFC 1213 MIB-II RFC 1215 Generic Traps RFC 1493 Bridge MIB RFC 2674 Bridge MIB Extensions RFC 2737 Entity MIB (Version 2) RFC 2819 RMON (1, 2, 3, 9) RFC 2863 Interface Group MIB RFC 3635 Ethernet-like MIB


# IES7521-24GF/8GE-4TF-AC

24 ports Gigabit SFP L3 Managed industrial Switch with 8 gigabit RJ45 Combo and 4-10G SFP+ Uplink


## Interfaces

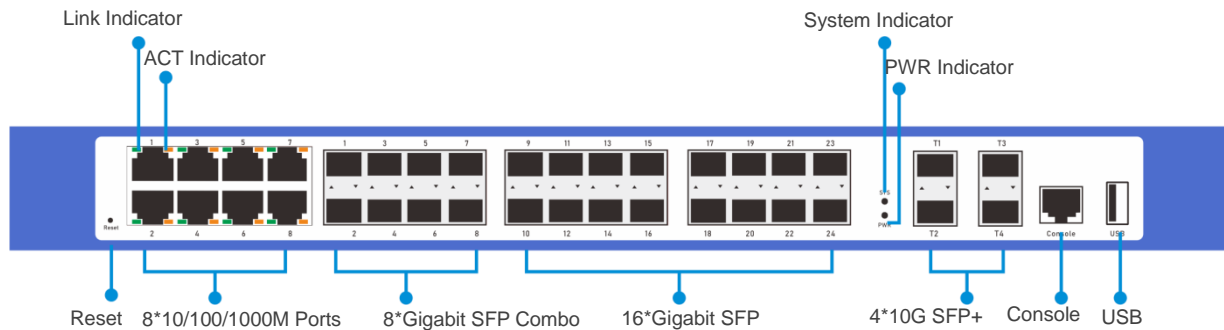

## Structure Diagrams

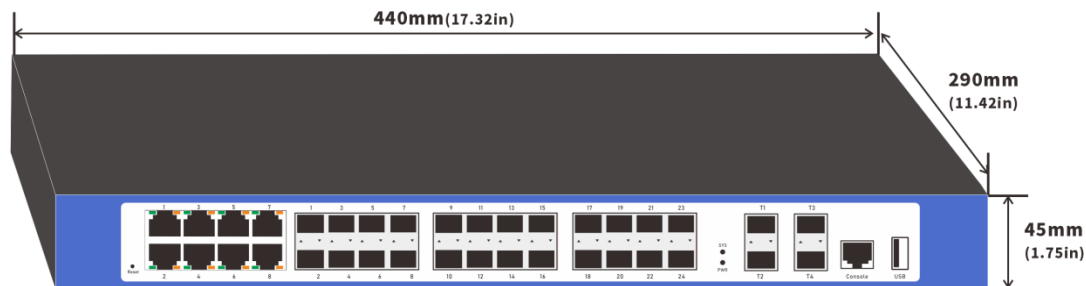

## Applications

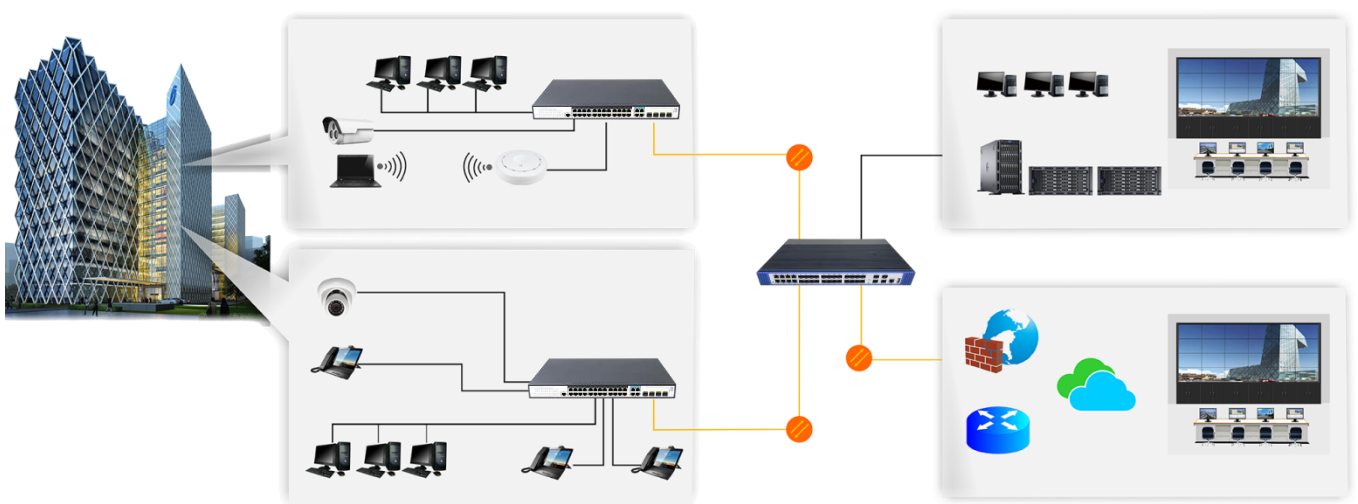

### Ordering Information

IES7521-24GF/8GE-4TF-AC

24 ports Gigabit SFP Layer 3 Managed Industrial Switch with 8 gigabit RJ45 Combo and 4-10G SFP+ Uplink