

PoE



Key Features:

Ports: Provide 2*10/100/1000Mbps Ethernet ports

PoE Standard: IEEE802.3af/at/bt Power over Ethernet (PoE) Compliant

Total Power: Total power budget of 90W for all singe PoE ports **Self-adaption:** RJ45 port supports 10/100/1000Mbps Auto MDI/MDIX **Wide Application:** Designed for Wifi AP and IP Security camera.VoIP etc

Surge protection: Protect the device from lighting surges and others electrical hazards

Considerate Design: Exquisite compact size.wall mounted with fanless design

Easy to use: Plug and play, No configuration required

Advanced 802.3bt PoE Network Solution

This high power Ultra PoE midspan Injector is a Single-Port, 802.3bt Power over Ethernet Injector with a maximum of up to 95 watts of power output over Ethernet cables. It is designed specifically to meet the demand for growing higher power required network equipment such as:

PTZ speed dome camera

All-in-one touch PC

Remote digital signage display

Other network devices that need higher power to work normally

All-in-One and Compact-size Design

With concepts of "Easy to install", "Plug and Play" and "Simple troubleshooting" for business and home users, the PoE injector is an all-in-one, single-port PoE+ injector with internal power supply. In the compact size housing and it provides one 100-240V AC input socket on its front panel, two LEDs (System POWER and PoE ACTIVE) on the top side and two RJ45 ports (POE port and LAN port) on the rear panel. Simply plug in the Ethernet cables and power cord, It is ready to provide high-speed network communication and high power PoE+ injector functions simultaneously with no need of software configuration.


Quick and Easy Cabling Installation for PoE Network Deployment


Complying with both 802.3af and 802.3at PoE+ standards, the POE Injector allows users to flexibly deploy standard and high powered devices to transfer data and power simultaneously through one Ethernet cable for up to 100 meters. It lso frees the security IP camera and wireless AP deployment from restrictions of power outlet locations and the additional AC wiring. It thus reduces cables and eliminates the need for electrical outlets on the wall, ceiling or any unreachable place, and most of all, it reduces installation time

Technical Datasheet


Model	PSE102-GE-90W	
Hardware Specifications		
Interface	"Data" Input Port: 1 x RJ45 STP	
	"PoE (Data + Power)" Output Port: 1 x RJ45 STP	
	AC Input Power Socket: 1	
LED Indicator	System: Power x 1 (Green)	
	PoE Port: Active, PoE ready-in-use x 1 (Green)	
Network Cable	10BASE-T: 2-pair UTP Cat. 3, 4, 5, up to 100M (328ft)	
	100BASE-TX: 2-pair UTP Cat. 3, 4, 5, up to 100M (328ft)	
	1000BASE-T: 4-pair UTP Cat. 5e, 6 up to 1000M (328ft)	
	EIA/TIA-568 100-ohm STP (100m)	
Data Rate	10/100/1000Mbps	
Unit Output Voltage	DC 50-56V	
PoE Supply Type	1245(+) 3678(-)	
Power Consumption	90 watts max.	
Number of Devices that can be powered	1	
Power requirement	AC100-240V 50/60Hz	
Environment enceification	Operating temperature: -20 $^\circ\!$	
Environment specification	Storage temperature: -40 $^\circ\!$	
Weight	0.4Kg	
Power over Ethernet (PoE) Specifications		
Network standard	IEEE 802.3 10BASE-T Ethernet	
	IEEE 802.3u 100BASE-TX Fast Ethernet	
	IEEE 802.3ab 1000BASE-T Gigabit Ethernet	
	IEEE 802.3af Power over Ethernet	
	IEEE 802.3at High Power over Ethernet Plus	
	IEEE 802.3bt High Power over Ethernet Plus	
PoE Standard	IEEE 802.3af Power over Ethernet/PSE	
	IEEE 802.3at Power over Ethernet Plus/PSE	
	IEEE 802.3bt Power over Ethernet	
PoE Supply Type	3645(+),12/78(-)	
Safety	FCC Part15 Class A,CE.RoHs	

Interfaces






Structure Diagrams



Applications

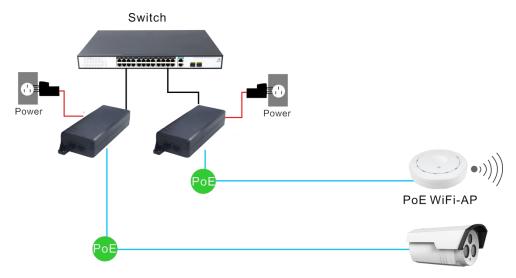

PoE IP Camera

Ordering Information	
PSE101-GE-90W	1 Ports 10/100/1000Mbps Ultra high power PoE midspan Injectors,90W Power