



1-Port 10/100Mbps Industrial Switch with 1 SFP



DIN
Rail



IES7310-1FE1F-DC

Key Features:

Ports: Provide 1*10/100Mbps Ethernet ports with 1* 100Mbps SFP

Self-adaption: RJ45 port supports 10/100Mbps Auto MDI/MDIX

Industrial Installation: Din Rail mounting installation

Wide Application: Designed for Railway, traffic etc some Industrial environment

Surge protection: Protect the device from lighting surges and others electrical hazards

Working Temperature: -40 to 85 degrees operating temperature

Considerate Design: IP40 Industrial enclosure

Easy to use: Plug and play, No configuration required

Environmentally Hardened Design

With the **IP40** metal industrial case which provides a high level of immunity against electromagnetic interference and heavy electrical surges, Being able to operate under the temperature range from **-40 to 85 degrees C**, the IES7310-1FE1F-DC can be placed in almost any difficult environment.



Dual Power input for High Availability Network

Featuring a strong dual power input system with wide-ranging voltages (12V~54V DC) incorporated into customer's automation network to enhance system reliability and uptime which make the installation more flexible and convenient.

Surge Protection Design

provides contact discharge of $\pm 8\text{KV}$ DC and air discharge of $\pm 15\text{KV}$ DC for Ethernet ESD protection. It also supports $\pm 6\text{KV}$ surge immunity to improve product stability and protects users' networks from devastating ESD attacks, making sure the flow of operation does not fluctuate.



Gigabit SFP Uplink Port

With one SFP module slot available, the SFP uplink port is ideal for connecting the switch to the network's backbone, providing more than enough bandwidth and stability for ultra high speed data transferring, Beside the SFP can transmitte the date with Max 100Km distance with more economic solution

IES7310-1FE1F-DC


1-Port 10/100Mbps Industrial Switch with 1 SFP

Technical Datasheet


| | | | |
|---------------------------|--|---|--|
| Model | IES7310-1FE1F-DC | | |
| Hardware Specifications | | | |
| ports | 1* 10/100BASE-T RJ45 auto-MDI/MDI-X ports 1* 100Mbps SFP Slot | | |
| Connector | Removable 6-pin terminal block Pin 1/2 for Power 1; Pin 3/4 for PG, Pin 5/6 for Power 2 | | |
| LED Display | Power Indicator: PWR(green).Network Indicator: Link(yellow) SFP: Green | | |
| Power requirements | 12~54V DC | | |
| Power Consumption | Less than 2 Watts | | |
| Power protection | Reverse protection; Over voltage protection, over current protection | | |
| Installation | DIN-rail kit and wall-mount kit | | |
| Switch Performance | Backplane bandwidth | 1Gbps | |
| | Packet forwarding rate | 0.75Mpps | |
| | MAC address | 2k | |
| | Flow control | Back pressure for half duple. IEEE 802.3x pause frame for full duplex | |
| Enclosure | IP40 Metal case | | |
| ESD Protection | 6KV ESD | | |
| Dimension(W x D x H) | 30x 90 x 130mm (1.18in x 3.54in x5.12in) | | |
| Weight | 0.55Kg | | |
| Standards Conformance | | | |
| Network standard | IEEE 802.3 10Base-T | | |
| | IEEE 802.3u 100Base-Tx | | |
| | IEEE 802.3x Full-Duplex Flow Control | | |
| Stability Testing | FCC CFR47 Part 15, EN55022/CISPR22, Class A | | |
| | EMS: | | |
| | IEC61000-4-2 (ESD): ±8kV (contact), ±15kV (air) | | |
| | IEC61000-4-3 (RS): 10V/m (80MHz-2GHz) | | |
| | IEC61000-4-4 (EFT): Power Port: ±4kV; Data Port: ±2kV | | |
| | IEC61000-4-5 (Surge): Power Port: ±2kV/DM, ±4kV/CM; Data Port: ±2kV | | |
| | IEC61000-4-6 (CS): 3V (10kHz-150kHz); 10V (150kHz-80MHz) | | |
| | IEC61000-4-16 (Common mode conduction): 30V (cont.), 300V (1s) | | |
| | IEC 60068-2-32 (free fall) | | |
| | IEC 60068-2-27 (shock) | | |
| IEC 60068-2-6 (vibration) | | | |
| Environment | | | |
| Environment specification | Operating temperature: -40℃~85℃, operating humidity: 5%~95% | | |
| | Storage temperature: -40℃~85℃, storage humidity: 5%~95% | | |
| Warranty | 5 Years | | |

Installation Models

Power Terminal




- ◆ 6-pin 3.81mm-spacing plug-in terminal
- ◆ 12V-54VDC wide voltage input
- ◆ P1&P2 dual power input
- ◆ Reverse protection

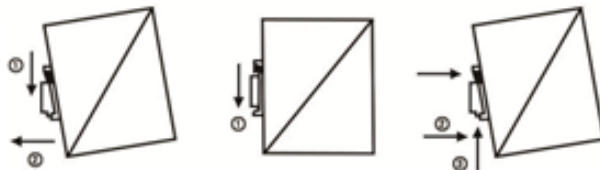


Din-Rail

Earth Protection




Ground terminal or screw

Mechanical Drawing

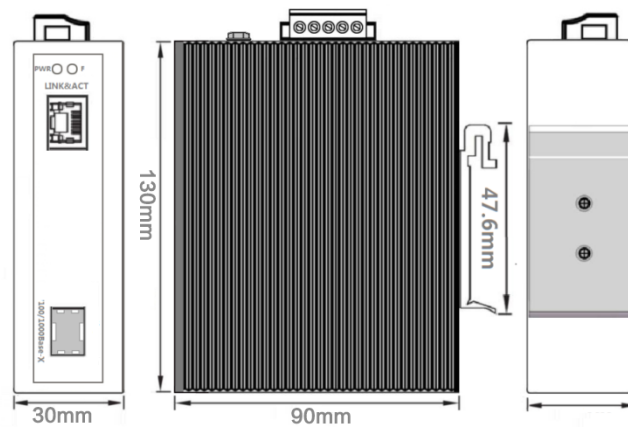

Applications

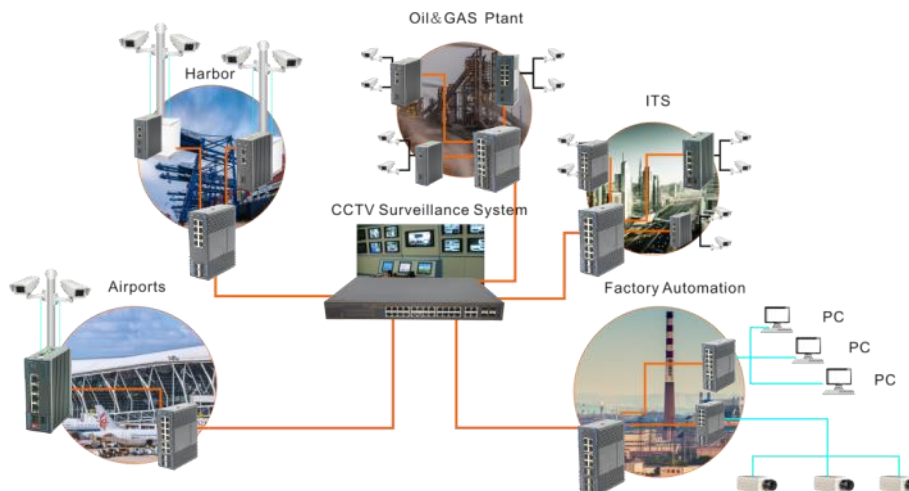

Ordering Information

| | |
|------------------|--|
| IES7310-1FE1F-DC | 1 Ports 10/100Mbps Industrial Ethernet switch With 1 SFP |
|------------------|--|